




Aquatica

(technical specification)

J1952

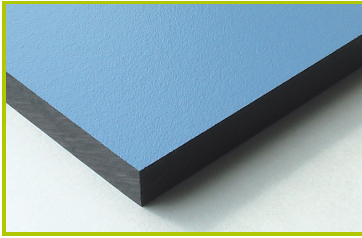


1- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.




2- **The vertical 95mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.
The posts are protected by injected polyamide caps.




3- **The shaped beam** (95mm thick, 200mm wide and 3.2m high) is made of oven-cured laminated wood with a surface coating; It gives the structure considerable strength.

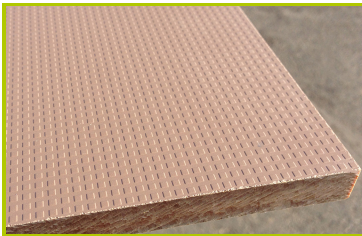

4- **The platforms** are made from a 12.5mm thick textured and non-slip compact material (HPL).

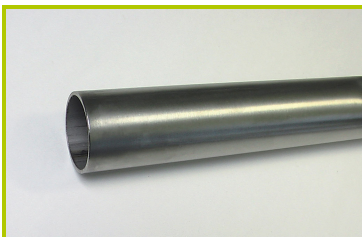

5- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.

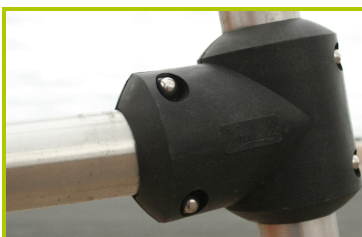

6- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



7- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



8- **The sliding surface** is made of 2mm thick stainless steel, which is shaped, bent and rolled from one piece.



9- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.