




Adventure

(technical specification)

J2770

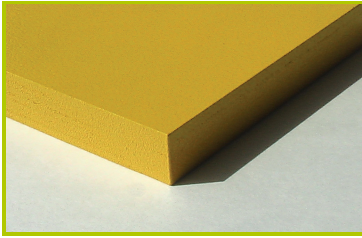


- 1- **The lacquered panels** are made from very high quality plywood 22mm thick, made of alternate layers of thin birch, which offers longevity and an exceptional mechanical strength. The colours are applied by electrostatic spraying of two-component polyurethane lacquer that is free of heavy metals, to ensure high levels of resistance to potentially aggressive chemicals such as anti-graffiti cleaning products.




- 2- **The shaped beams** (95mm thick, 200mm wide and 3.2m high) are made of oven-cured laminated wood with a surface coating; It gives the structure considerable strength.



- 3- **The vertical 95mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.
The posts are protected by injected polyamide caps.

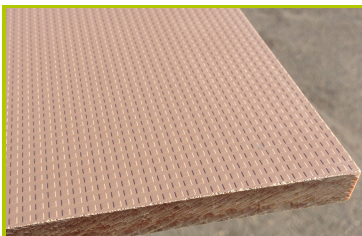

- 4- **The platforms** are made from a 12.5mm thick textured and non-slip compact material (HPL).

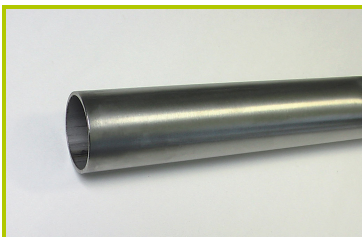

- 5- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



- 6- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



7- **The gangway floor** is made of solid wood planks, with rubber elements between the planks to avoid all risk of catching a finger.



8- **The 16mm diameter ropes** are made of galvanized steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



10-**The sliding surface** is made of 2mm thick stainless steel, shaped, bent and rolled in one piece.



11-**The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.