



Ixo

(technical specification)

J2531-M



1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.



2- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features.




3- **The tubes** are made of 40mm and 101.6mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.




4- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



5- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL). Further reinforcement is provided by lacquered galvanised steel supports, located on the underside of the platforms.

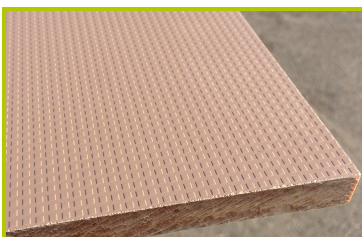

6- **The climbing wall** is made from a 12.5mm thick textured and non-slip compact material (HPL).

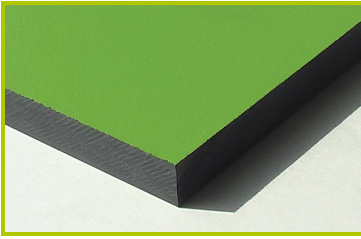


7- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



8- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



9- **The ladder rungs** are made of acacia wood which is naturally rot-resistant and smooth to the touch. They are mounted on a 16mm diameter polyester cable.

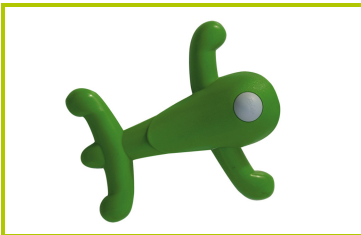

10-**The climbing holds** are made of polyamide for its strength and rigidity.



11-**The chains** are made of stainless steel.



12-**The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.