



Swings

(technical specification)

J492



1- **The 125mm diameter posts** are made of painted galvanised steel, ensuring robustness and durability. The caps are made of injection moulded polyamide.



2- **The horizontal beams of the swings** are made of non-painted galvanised steel.



3- **The swing bearings** are made of stainless steel.




4- **The pod** is made from a single piece of 30%-recycled rotomoulded polyethylene. It is fixed to a stainless steel frame that is fitted with buffers. The pod is suspended from galvanised steel ropes covered by PVC.



5- **PVC sliding rings** are fitted to limit the wear of the metal parts over time. The rings are accessed by a vandal proof, stainless steel shackle. The swing chains are made of galvanised steel.



6- **The swing seat** is made of a stainless steel frame with a rubber seat pad incorporating a stainless steel cable. The swing chains are made of stainless steel.

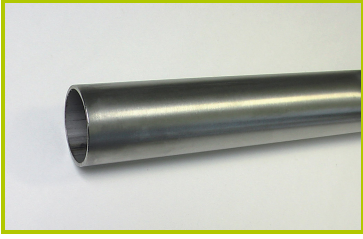

7- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



8- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.