



Ixo (technical specification)

J2578-M




1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.



2- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features.



3- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.

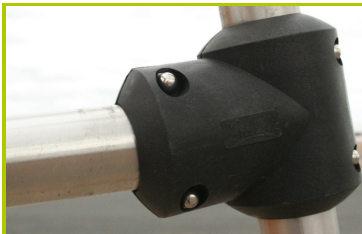

4- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



5- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL). Further reinforcement is provided by lacquered galvanised steel supports, located on the underside of the platforms.



6- **The rubber ring** is a monobloc element made of polyethylene with an outside diameter of 70cm and inside diameter of 45cm.



7- **The strap** is made of 3 ropes linked together with aluminium pliers. Each rope, of 16mm diameter, is made up of galvanized steel cables covered in polypropylene.



8- **The climbing holds** are made of polypropylene. They are non-toxic, inflammable and shock and UV resistant.



9- **The one-piece rail** is made of stainless steel, Ø 76.1mm, 3.6mm thick. The trolley is made of stainless steel ensuring its durability.



10-**The grip section of the stainless steel handle** is overmoulded with rubber to give a good grip.



11-**The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.