



## Ixo (technical specification)

**J2579-M**



1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.



2- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features.



3- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL). Further reinforcement is provided by lacquered galvanised steel supports, located on the underside of the platforms.




4- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



5- **The rubber ring** is a monobloc element made of polyethylene with an outside diameter of 70cm and inside diameter of 45cm.



6- **The tunnel** (L: 4.05m - Ø 0.78m) is made of steel mesh netting, Ø 6mm, with Rilsan plastic covering.

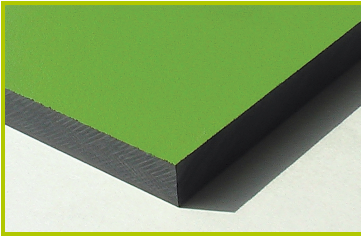

7- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



8- **The seat** is made of shock absorbing moulded honeycomb rubber.



9- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.