





Kanopé

(technical specification)

J56103

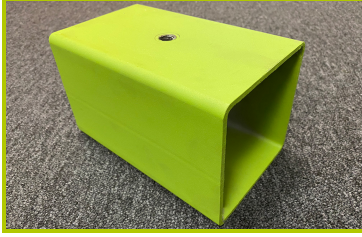

1- **The 120 x 120mm posts** are made of painted galvanised steel, ensuring robustness and durability.

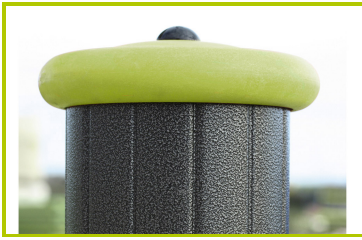


2- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.




3- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.




4- **The slatted fences** are made of composite wood (slats of 70 x 30 mm), which is a chip and split resistant waterproof material with UV protection.

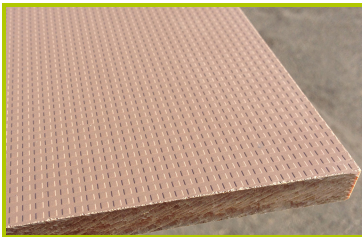

5- **The platforms** are made from a 12.5mm thick textured and non-slip compact material (HPL).

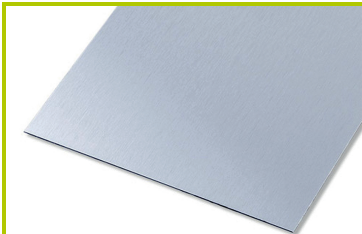

6- **The wall panels** are made of 3mm perforated aluminium sheet coated with a polyester epoxy lacquer.

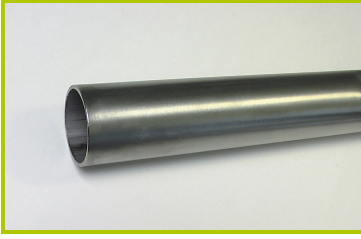

7- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



8- **The panels** are made of stainless steel mesh netting, Ø 6mm.



9- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



10-**The net fittings** are made of polyamide.
The fittings are composed of two distinct parts for ease of maintenance of individual strands.



11-**The net fittings** are made of polyamide and are used to link three cords together.




12-**The footrests** are made from rubber, 14mm thick.




13-**The tunnel** (L: 4.05m - Ø 0.78m) is made of steel mesh netting, Ø 6mm, with Rilsan plastic covering.



14-The slides are made of rotomoulded polyethylene.

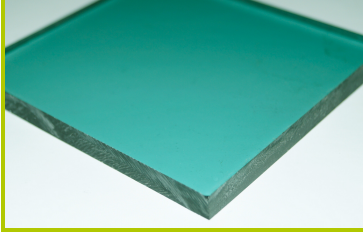

15-The porthole is made from 8mm thick methacrylate (PMMA).

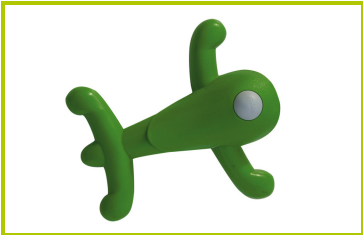

16-The climbing holds are made of polyamide for its strength and rigidity.



17-The fixings are made of stainless or plated steel and protected by anti-vandalism polyamide caps.