



Ixo (technical specification)

J2587-M



1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.




2- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features.



3- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL). Further reinforcement is provided by lacquered galvanised steel supports, located on the underside of the platforms.



4- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.

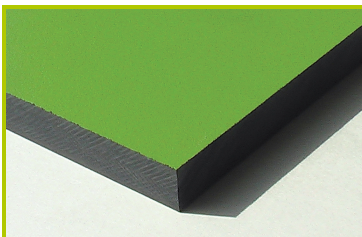

5- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



6- **The tunnel** (L: 4.05m - Ø 0.78m) is made of steel mesh netting, Ø 6mm, with Rilsan plastic covering.




7- **The rubber ring** is a monobloc element made of polyethylene with an outside diameter of 70cm and inside diameter of 45cm.




8- **The 16mm diameter rope** is made of galvanized steel cable covered with polyester.



9- **The fittings** are made of polyamide and are used to link three cords together.

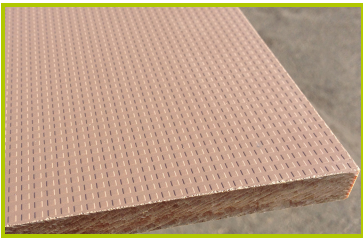

10-**The climbing wall** is made from a 12.5mm thick textured and non-slip compact material (HPL).

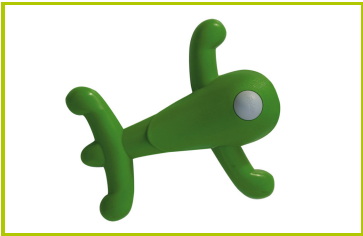

11-**The climbing holds** are made of polyamide for its strength and rigidity.



12-**Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



13-**The ladder rungs** are made of acacia wood which is naturally rot-resistant and smooth to the touch. They are mounted on a 16mm diameter polyester cable.



14-The fixings are made of stainless or plated steel and protected by anti-vandalism polyamide caps.