




# The Sand Factory

(technical specification)

J5001




- 1- **The vertical 95mm square post** are made of laminated timber, which have not been treated with chrome or arsenic. Splinter-free, the laminate provides great strength and dimensional stability. The posts are protected from wear and tear caused by fungi and insects.  
The posts are protected by injected polyamide caps.

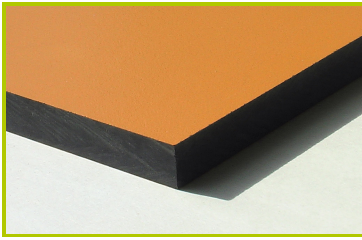

- 2- **The coloured panels** are made from a 13mm thick compact material (HPL). Robust in construction, it has excellent weather and vandal resistance properties.



- 3- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.

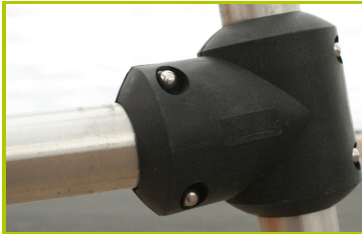


- 4- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



- 5- **The buckets** are made of rotomoulded polyethylene.



- 6- **Metal components of the digger** are made of stainless steel, guaranteeing lasting durability and reliability of the equipment.

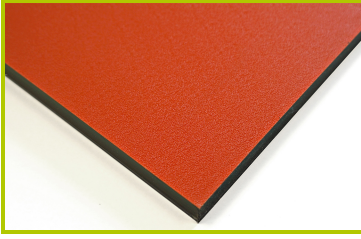

7- **The seat of the excavator** is made from a 18mm thick, non-slip polyethylene material.



8- **The handle** is made of very strong polyamide plastic.



9- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.