



Ixo (technical specification)


J2576-M



- 1- **The 125mm diameter posts** are made of painted galvanised steel. The two-tone grey grained finish has a slightly undulating surface for increased scratch resistance. The caps are made of injection moulded polyamide.



- 2- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features.

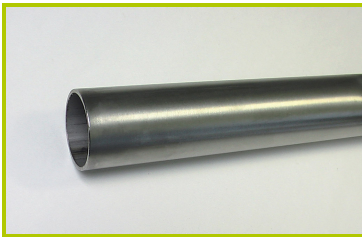


- 3- **The tubes** are made of 40mm diameter stainless steel, guaranteeing lasting durability and reliability of the equipment.



- 4- **Injection moulded polyamide fixings** connect the posts with the platforms and the various play features. They are non-toxic, flameproof and U.V. resistant. The thickness of the polyamide makes the equipment both strong and vandal resistant.



- 5- **The platforms** are made from a 12.5mm thick, textured, non-slip compact material (HPL). Further reinforcement is provided by lacquered galvanised steel supports, located on the underside of the platforms.

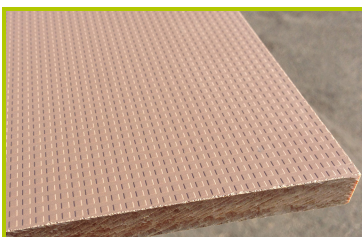

- 6- **The unstable platform** is made from a 12.5mm thick textured and non-slip compact material (HPL).



7- **The strap** is made of 3 ropes linked together with aluminium pliers. Each rope, of 16mm diameter, is made up of galvanized steel cables covered in polypropylene.



8- **The 16mm diameter ropes** are made of galvanised steel cable covered with polyester. The cables are linked together and held in place by injected polyamide spheres.



9- **The fixings** are made of stainless or plated steel and protected by anti-vandalism polyamide caps.